



PARK INDUSTRIAL PRESSURE VESSELS WITH FLANGED TOP&BOTTOM OPENINGS

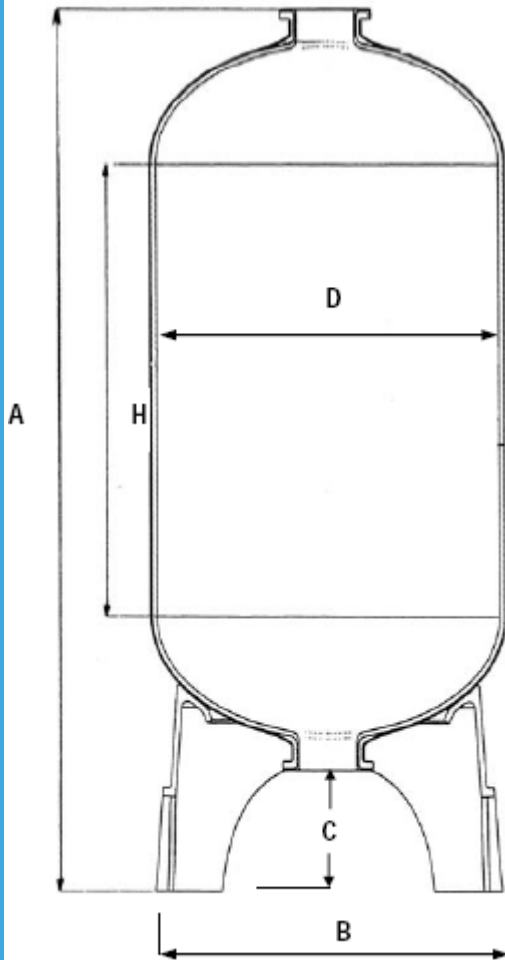

- Made in European Union (Belgium);
- composite pressure vessels PE liner reinforced with fiberglass and epoxy resin;
- for industrial and potable water treatment systems;
- European 97/23/EC Directive compliant for pressure equipment (PED);
- certification for contact with drinking water following EC directives and KTW recommendations;
- D.M. n.174 dated 06/04/2004 compliant about materials suitable for contact with water for human consumption;
- max operating pressure 10 bar;
- max operating temperature 65°C;
- top and bottom 6" flange connection;
- cycle test 250.000 times from 0,7 to 10 bar;
- burst test to 4 times max operating pressure;
- blue colour;
- warranty 5 years.

FLANGED TOP&BOTTOM OPENINGS DETAIL

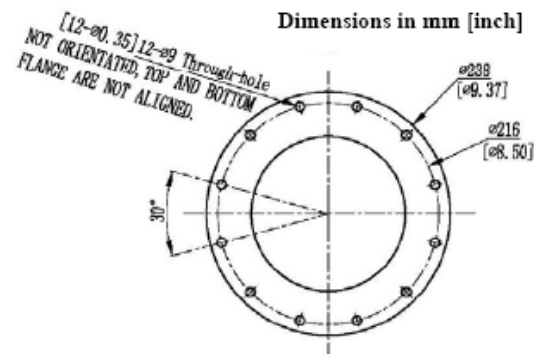

REF.	MODEL	VOLUME (liters)	DIAMETER (mm)	A (mm)	B (mm)	C (mm)	H (mm)	CONNECTION (inch)
B18068MB	18 x 68	250	469	2120 ± 20	545	240	1344	6"
B21066MB	21 x 66	310	552	2010 ± 20	545	368	1158	6"
B24075MB	24 x 75	450	610	2220 ± 20	620	354	1320	6"
B30078MB	30 x 78	710	770	2285 ± 30	778	365	1284	6"
B36078MB	36 x 78	1020	910	2340 ± 30	955	360	1235	6"
B42063MB	42 x 63	1047	1074	2065 ± 30	1090	440	775	6"
B42072MB	42 x 72	1360	1074	2415 ± 30	1090	440	1142	6"
B48072MB	48 x 72	1840	1220	2430 ± 30	1280	400	1135	6"
B63067MB	63 x 67	2484	1623	2075 ± 30	1575	355	594	6"
B63086MB	63 x 86	3200	1623	2475 ± 30	1575	355	996	6"